


NO	NOTES											
1.	COLOR CODE: <div><div>BK-BLACK W - WHITE R - RED G - GREEN O - ORANGE</div><div>BL - BLUE Y - YELLOW BR - BROWN P - PURPLE S - SLATE</div></div>											
2.	———X DENOTES SPLICED, SOLDERED, AND TAPED WIRES.											
3.	COMPONENTS SHOWN DOTTED ARE ACCESSORIES TO CABINET.											
4.	USE POWER AND SIGNAL LINE INTERFERENCE SUPPRESSORS FOR INSTALLATIONS REQUIRING MINIMUM R.F. INTERFERENCE. FOR OTHER INSTALLATIONS, OMIT SUPPRESSORS AND CONNECT INPUTS DIRECTLY TO TERMINALS SHOWN.											
5.	<p>CABINET POWER CIRCUIT WIRED FOR 115 V. D.C. OPERATION. CONNECT GROUNDED SIDE OF INPUT POWER, OR NEGATIVE SIDE OF UNGROUNDED POWER TO TERMINAL C40 OR THROUGH THIS SIDE OF FILTER. POLARITIES SHOWN (+) AND (-) ARE FOR NEGATIVE GROUNDED POWER. THE ASSOCIATED ELECTRICAL SERVICE UNIT MUST BE WIRED FOR D.C. OPERATION</p> <p>SELECT THE DESIRED OPERATING CONDITIONS FROM THE FOLLOWING TABLE AND MAKE CONNECTIONS AT THE CABINET TERMINAL BLOCKS WITH THE TWO 153483 STRAPS FURNISHED WITH THE 152624 A.C. TO D.C. ASSEMBLY :</p> <p>SIGNAL LINE CIRCUIT ACCESSORY OPERATION.</p> <table><tr><td></td><td>OPERATES CONTINUOUSLY</td><td>OPERATES WITH POWER SWITCH</td><td>OPERATES WITH MOTOR CONTROL</td></tr><tr><td rowspan="2">POWER SOURCE</td><td>NEGATIVE GROUND OR UNGROUNDED</td><td>C 21 - C 38 C 22 - C 40</td><td>C 21 - C 37 C 22 - C 40</td></tr><tr><td>POSITIVE GROUND</td><td>C 22 - C 38 C 21 - C 40</td><td>C 22 - C 37 C 21 - C 40</td></tr></table> <p>SEE APPROPRIATE ELECTRICAL SERVICE UNIT SCHEMATIC WIRING DIAGRAM.</p>		OPERATES CONTINUOUSLY	OPERATES WITH POWER SWITCH	OPERATES WITH MOTOR CONTROL	POWER SOURCE	NEGATIVE GROUND OR UNGROUNDED	C 21 - C 38 C 22 - C 40	C 21 - C 37 C 22 - C 40	POSITIVE GROUND	C 22 - C 38 C 21 - C 40	C 22 - C 37 C 21 - C 40
	OPERATES CONTINUOUSLY	OPERATES WITH POWER SWITCH	OPERATES WITH MOTOR CONTROL									
POWER SOURCE	NEGATIVE GROUND OR UNGROUNDED	C 21 - C 38 C 22 - C 40	C 21 - C 37 C 22 - C 40									
	POSITIVE GROUND	C 22 - C 38 C 21 - C 40	C 22 - C 37 C 21 - C 40									
6.	NECESSARY STRAP CONNECTIONS AT THE CABINET TERMINAL BLOCKS ARE SHOWN ON THE ASSOCIATED ELECTRICAL SERVICE UNIT WIRING DIAGRAM. SEE THE LESU7 ACCESSORY GROUP B.M. FOR THE DIAGRAM NUMBER.											

NO.	NOTES						
7.	ACCESSORY GROUP ASSIGNMENTS						
	ACCESS. GROUP NO.	COPYLIGHT SYSTEM	MARGIN IND. LAMP	SIGNAL BELL	ELEC. NOISE SUPPRESSORS		
	130, 137, 150	X	X	X			
	148, 149, 194 195	X	X	X	X		

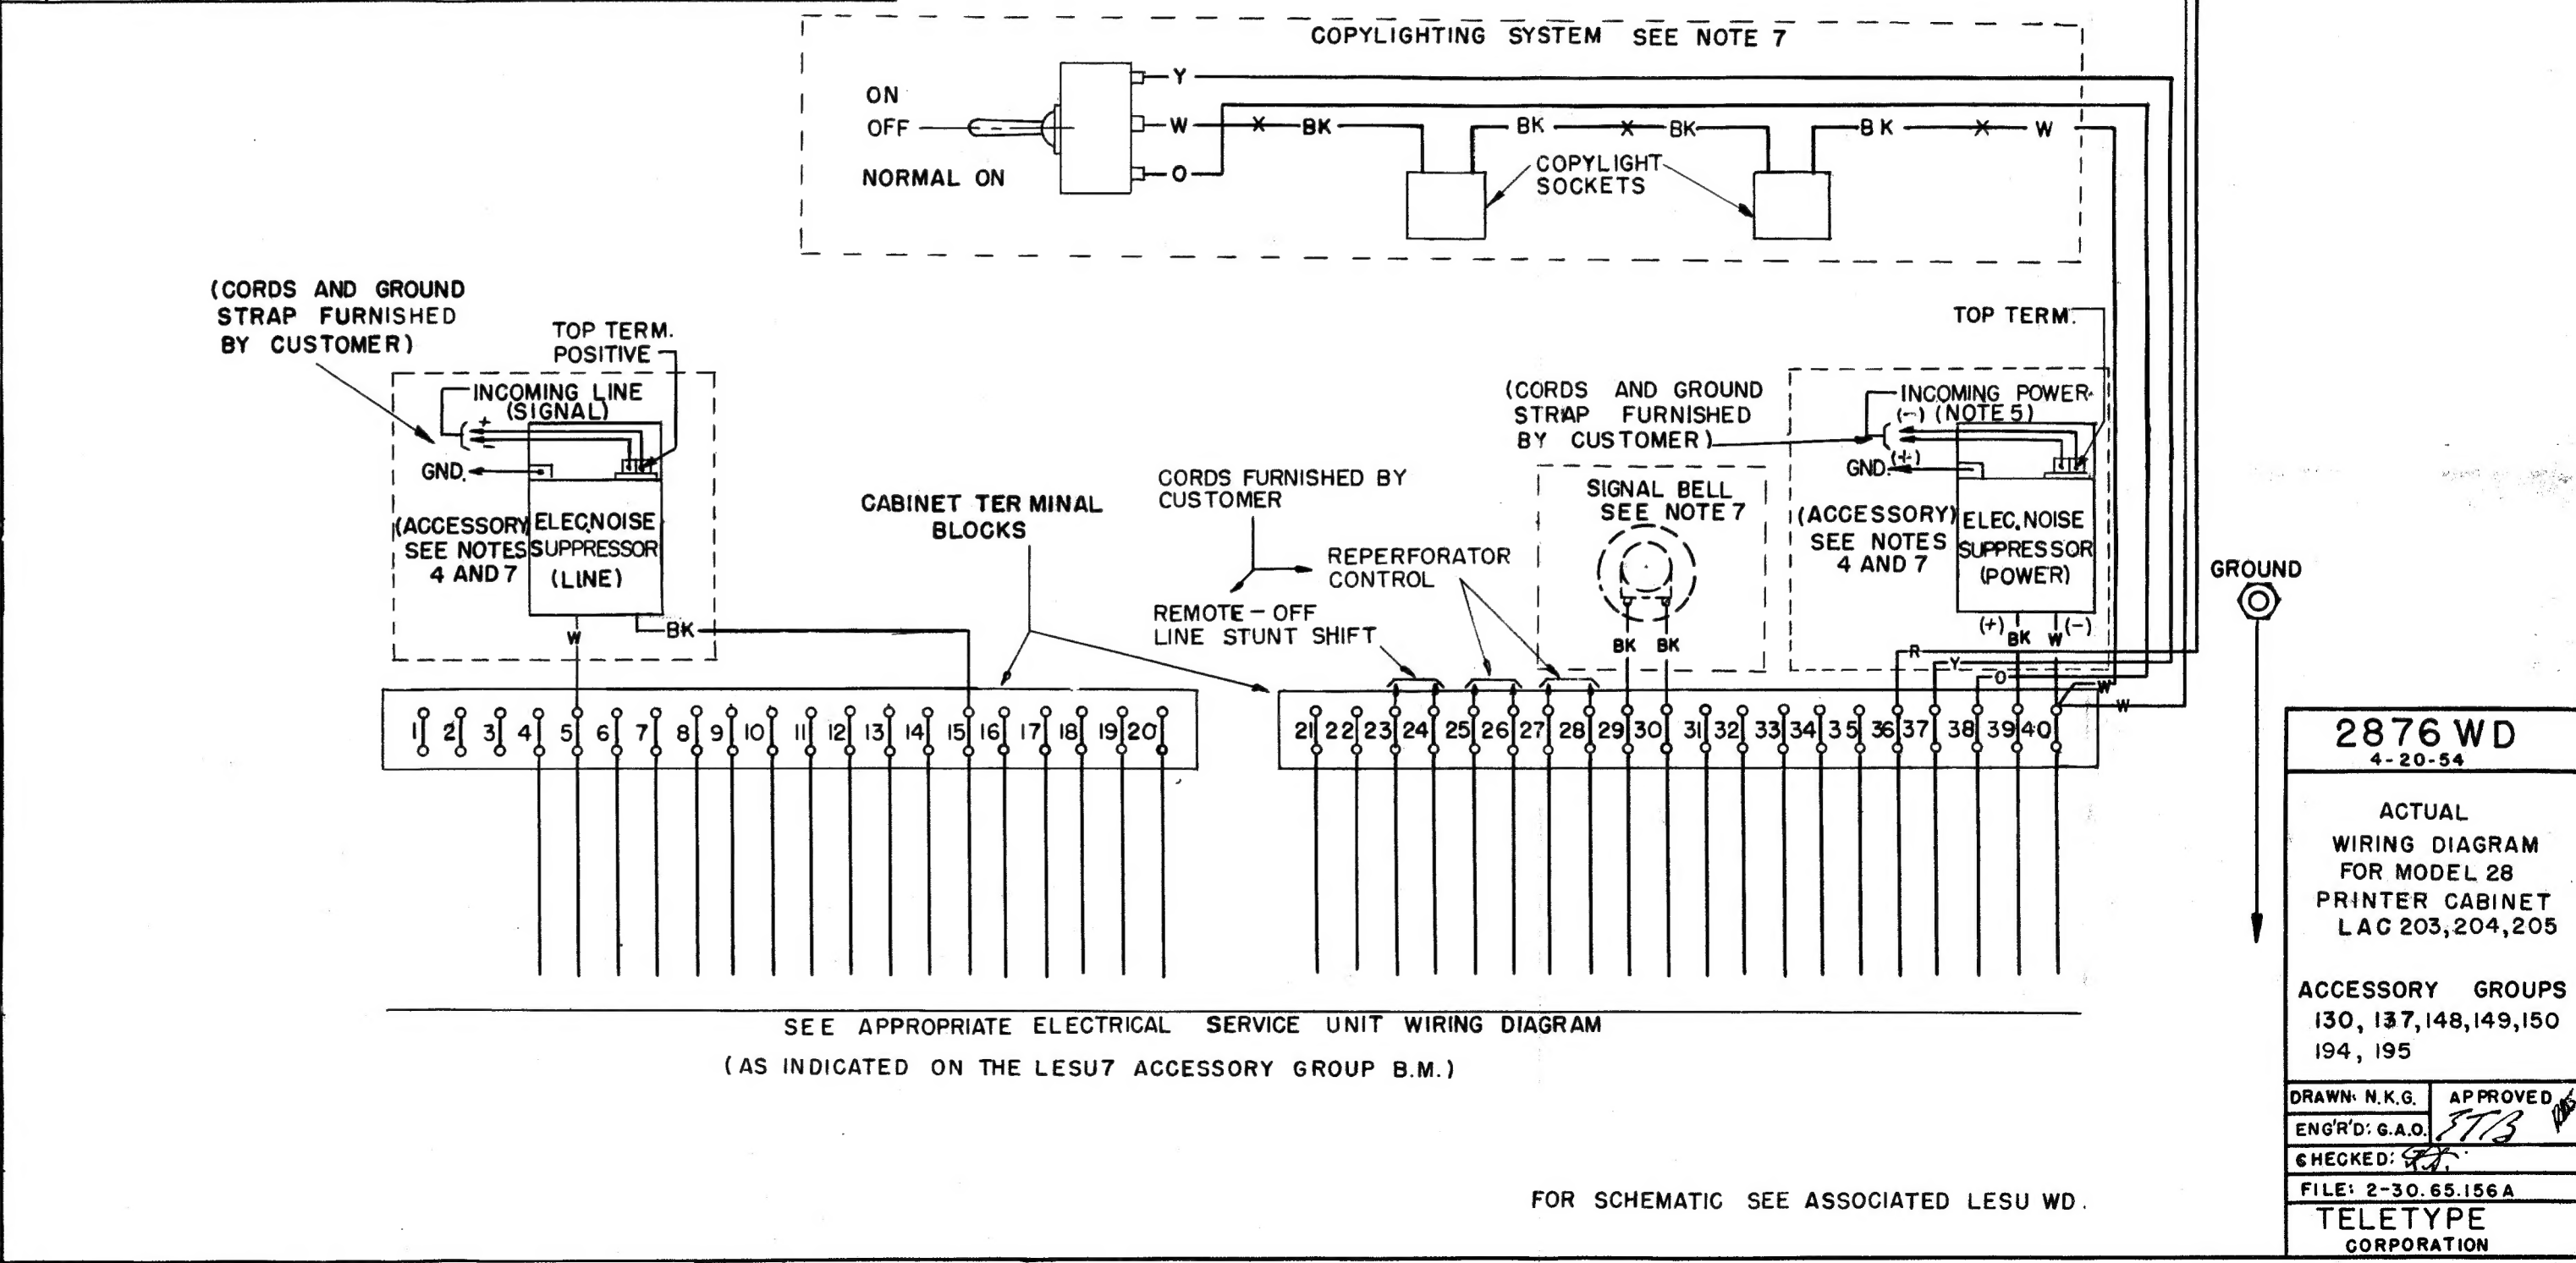

REVISIONS			
A	1-14-55	28-4814	
B	1-22-55	28-4921	
C	1-25-55	28-4869	
D	7-8-55	28-5583	
E	8-13-55	28-5607	
F	7-13-56	28-6816	

2876 WD

4-20-54

ACTUAL WIRING DIAGRAM FOR MODEL 28 PRINTER CABINET LAC 203,204,205

ACCESSORY GROUPS 130, 137, 148, 149, 150 194, 195

DRAWN: N.K.G.

ENG'R'D: G.A.O.

CHECKED: *ETB*

FILE: 2-30.65.156A

APPROVED: *ETB*

TELETYPE CORPORATION